


Class B

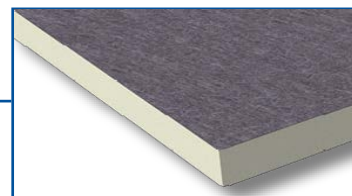

■ Description

STIFERITE CLASS B is a high performance insulation board manufactured from CFC or HCFC free, closed cell polyisocyanurate (PIR) foam. It's covered on one side by mineral saturated fiber glass and on the other side by bituminous fiber glass with PP layer, applicable to the bituminous waterproof membranes by torch.

■ Guideline for drafting of technical specifications

Thermal insulation **STIFERITE CLASS B** in polyiso rigid foam (PIR) of thickness ... (*), covered on one side by mineral saturated fiber glass and on the other side by bituminous fiber glass with PP layer, applicable to the bituminous waterproof membranes by torch, has:

Declared thermal resistance: $R_D = \dots \text{ m}^2\text{K/W}$ (EN 13165 Annex A and C)

... (it is recommended to complete the technical specification using the most relevant features and performance for the specific application)

STIFERITE CLASS B is produced of Company certified according to: **UNI EN ISO 9001** quality management system, **UNI EN ISO 14001** environmental management system, **UNI EN ISO 45001** occupational health and safety management system, and it has CE marking and labelling. The **Environmental Product Declaration (EPD)**, verified by the Third Party Liability, and the **Environmental Minimum Criteria (CAM)** according to **Green Public Procurement (GPP)** are available.

(*) Parameters change according to thickness or system. To determine the values corresponding to the thickness used, please use the specifications indicated on this technical sheet.

■ Dimensions

length and width
600 x 1200 mm
nominal thickness [d] EN 823:
from 30 to 200 mm

■ Main applications

Insulation of floor and roof under bituminous waterproof membrane where required high resistance to the torch



■ MAIN CHARACTERISTICS AND PERFORMANCE - Relevant to the CE marking [UNI EN 13165]

■ Declared thermal conductivity - λ_D [W/mK]

UNI EN 13165 Annex A e C

Value determined at an average temperature of 10°C
see table - values according to thickness

■ Declared thermal resistance - $R_D = d / \lambda_D$ [m²K/W]

see table - values according to thickness

■ Declared thermal transmittance - $U_D = \lambda_D / d$ [W/m²K]

see table - values according to thickness

■ Reaction to fire

EN 13501-1, EN 11925-2, EN 13823

E EUROCLASS

■ Compressive stress at 10% deformation - σ_{10} [kPa]

EN 826

> 150 [CS(10/Y)150] CE Designation code

■ Tensile strength perpendicular to faces - σ_{mt} [kPa]

EN 1607

> 40 [TR40] CE Designation code

■ Water vapour diffusion resistance factor - μ

EN 12086

600 - 150 [MU280] CE Designation code

■ Short term water absorption by partial immersion [kg/m²]

EN 1609

< 0,3 [WS(P)0,3] CE Designation code

■ Long term water absorption by total immersion [% weight]

EN 12087

< 2 per $d < 120 \text{ mm}$ [WL(T)2] CE Designation code

< 1 per $d \geq 120 \text{ mm}$ [WL(T)1] CE Designation code

■ Deviation from flatness after one-sided wetting [mm]

EN 13165

≤ 10 [FW2] CE Designation code

■ Flatness tolerance S_{max} [mm]

EN 825

± 5 Area < 0,75 m²

± 10 Area > 0,75 m²

d mm	λ_D W/mK	R_D m²K/W	U_D W/m²K
30	0,027	1,11	0,90
40		1,48	0,68
50		1,92	0,52
60		2,31	0,43
70	0,026	2,69	0,37
80		3,08	0,33
100		4,00	0,25
120		4,80	0,21
140	0,025	5,60	0,18
160		6,40	0,16
180		7,50	0,13
200		8,33	0,12

■ Dimensional stability [level]

EN 1604

48 h, 70° C, 90% R.H.

3 per $d < 40 \text{ mm}$ [DS(70;90)3] CE Designation code

4 per $d \geq 40 \text{ mm}$ [DS(70;90)4] CE Designation code

48 h, -20° C

2 [DS(-20;0)2] CE Designation code

■ Tolerances [mm]

EN 13165

Length and width

± 5 < 1000 mm [T2] CE Designation code

± 7,5 da 1001 a 2000 mm [T2] CE Designation code

■ Thickness [mm]

± 2 < 50 mm [T2] CE Designation code

± 3 da 50 a 75 mm [T2] CE Designation code

+ 5/-2 ≥ 75 mm [T2] CE Designation code

OTHER CHARACTERISTICS AND PERFORMANCE

- **Overall density - ρ [kg/m³]**
EN1602 Board average value
44 ± 1,5
- **Specific heat - Cp [J/kg° K]**
Average value
1710
- **Compressive stress at 2% deformation - σ_2 [kg/m²]**
EN 826
> 5000
- **Deformation under compressive load and temperature conditions - ϵ_d [%]**
EN 1605
≤ 5 - load 20 kPa at 80° C for 48 h [DLT(1)5] CE Designation code
- **Compressive Creep - ϵ_d [%]**
EN 1606
< 1.5 d = 200 mm [CC(1.5/1.0/50)25] CE Designation code
- **Pull-through resistance - [N]**
EN 16382
> 800
- **Water vapour resistance - Z [m²hPa/mg]**
EN 12086
26 - 41
- **Dimensional stability [% Relative changes]**
EN 1604
**7 d, 70° C
< 1**
- **Weight percentage of recycled material - [%]**
Procedure REMADE®
> 4

ADDITIONAL REPORTS AND CERTIFICATION

- **Management System Certification:**
 - UNI EN ISO 9001 quality management system,
 - UNI EN ISO 14001 environmental management system,
 - UNI EN ISO 45001 occupational health and safety management system
- **Environmental Product Declaration (EPD), by the Third Party Liability**
ISO 14025 and EN 15804
- **Acoustic isolation of roof - R_w [dB]**
UNI EN ISO 140-3, UNI EN ISO 717-1
40
see "Isolamento Acustico" technical notebook on www.stiferite.com
- **Dynamic stiffness - s^t [MN/m³]**
EN 29052-1
see "Isolamento Acustico" technical notebook on www.stiferite.com CLASS SK product
- **Reaction to fire - continuous smouldering combustion**
EN 16733
No continuous smouldering combustion
- **External fire Exposure to roof**
EN 1187
Broof (t2)
- **Release of volatile organic compounds**
EN 16516, ISO 16000-3, ISO 16000-6
Certificate Indoor Air Comfort Gold for until 100 mm of thickness

NOTES

■ Temperature stability

Stiferite panels can be used in a continuous temperature range of -40° C to +110° C. For periods of time they can withstand temperatures up to + 200° C, or equivalent to the softening temperature of bitumen, without any particular problems. Long exposures at temperatures above + 110° C may cause deformations to the foam or coatings, but do not cause sublimation or melting.

■ Aspect

Any small non-adhesion areas between the facers and the foam or holes originate from the production process and they do not in any way affect the physical-mechanical properties of the panels. A prolonged exposure of polyurethane foam to UV rays can cause surface oxidation, the phenomenon does not affect the basic characteristics and performance of the panel.

■ Packaging & Storage

STIFERITE panels of standard sizes are normally packed with PE, in closed packages with CE mark label. Store the packages raised from the ground. For long periods, store the packages in wet area.

■ Warning

The data shown in this sheet are binding for the features and performances provided by the CE marking. Other features and additional information may be modified even if no specific signal is available.

■ Other notes

To obtain technical data not covered in this Technical Data Sheet, contact the Stiferite Technical Office