


# AI5 Edilizia

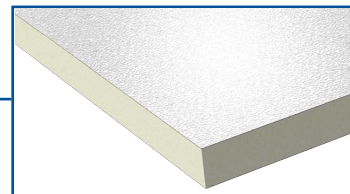

## ■ Description

**STIFERITE AI5 Edilizia** is a high performance insulation board manufactured from CFC or HCFC free, closed cell polyisocyanurate (PIR) foam. It's covered on both side by embossed aluminium of 60 µm of thick.

## ■ Guideline for drafting of technical specifications

Thermal insulation **STIFERITE AI5 Edilizia** in polyiso rigid foam (PIR) of thickness...(\*), covered on both side by embossed aluminium of 50 µm of thick, has:

Declared thermal resistance:  $R_D = \dots$  m<sup>2</sup>K/W (EN 13165 Annex A and C)

... (it is recommended to complete the technical specification using the most relevant features and performance for the specific application)

**STIFERITE AI6 Edilizia** is produced of Company certified according to: **UNI EN ISO 9001:2015** quality management system, **UNI EN ISO 14001:2015** environmental management system, **OHSAS 18001:2007** occupational health and safety management system, and it has CE marking and labelling. The **Environmental Product Declaration (EPD)**, verified by the Third Party Liability, and the **Environmental Minimum Criteria (CAM)** according to **Green Public Procurement (GPP)** are available.

(\* ) Parameters change according to thickness or system. To determine the values corresponding to the thickness used, please use the specifications indicated on this technical sheet.

## ■ Dimensions

length and width  
600 x 1200 mm  
nominal thickness [d] EN 823:  
**from 20 to 120 mm**

## ■ Main applications

Wall insulation where is needed a water vapour barrier  
Floor insulation  
Roof insulation  
Industrial insulation



## ■ MAIN CHARACTERISTICS AND PERFORMANCE - Relevant to the CE marking [UNI EN 13165]

### ■ Declared thermal conductivity - $\lambda_D$ [W/mK]

UNI EN 13165 Annexi A e C

Value determined at an average temperature of 10° C  
**see table - values according to thickness**

### ■ Declared thermal resistance - $R_D = d / \lambda_D$ - [m<sup>2</sup>K/W]

see table - values according to thickness

### ■ Declared thermal transmittance - $U_D = \lambda_D / d$ [W/m<sup>2</sup>K]

see table - values according to thickness

### ■ Reaction to fire

EN 13501-1, EN 11925-2, EN 13823

**D s2 d0 EUROCLASS d = 20 and 30 mm**

### ■ Compressive stress at 10% deformation - $\sigma_{10}$ [kPa]

EN 826

**> 175** [CS(10/Y)175] CE Designation code

### ■ Tensile strength perpendicular to faces - $\sigma_{mt}$ [kPa]

EN 1607

**> 30** [TR30] CE Designation code

### ■ Water vapour diffusion resistance factor - $\mu$

EN 12086

**Endless** [MUendless] CE Designation code

### ■ Short term water absorption by partial immersion [kg/m<sup>2</sup>]

EN 1609

**< 0,1** [WS(P)0,1] CE Designation code

### ■ Long term water absorption by total immersion [% weight]

EN 12087

**< 1** [WL(T)1] CE Designation code

### ■ Deviation from flatness after one-sided wetting [mm]

EN 13165

**≤ 10** [FW2] CE Designation code

### ■ Flatness tolerance $S_{max}$ [mm]

EN 825

**± 5 Area < 0,75 m<sup>2</sup>**

**± 10 Area > 0,75 m<sup>2</sup>**

d mm	$\lambda_D$ W/mK	$R_D$ m <sup>2</sup> K/W	$U_D$ W/m <sup>2</sup> K
20	0,022	0,91	1,10
30		1,36	0,73
40		1,82	0,55
50		2,27	0,44
60		2,73	0,37
80		3,64	0,28
100		4,55	0,22
120		5,45	0,18

### ■ Dimensional stability [level]

EN 1604

**48 h, 70° C, 90% R.H.**

**3 per d < 30 mm** [DS(70;90)3] CE Designation code

**4 per d ≥ 30 mm** [DS(70;90)4] CE Designation code

**48 h, -20° C**

**2** [DS(-20;0)2] CE Designation code

### ■ Tolerances [mm]

EN 13165

**Length and width**

**± 5 < 1000 mm** [T2] CE Designation code

**± 7,5 da 1001 a 2000 mm** [T2] CE Designation code

### ■ Thickness [mm]

**± 2 < 50 mm** [T2] CE Designation code

**± 3 da 50 a 75 mm** [T2] CE Designation code

**+ 5/-2 ≥ 75 mm** [T2] CE Designation code

## OTHER CHARACTERISTICS AND PERFORMANCE

- **Overall density -  $\rho$  [kg/m<sup>3</sup>]**  
EN1602 Board average value  
**40 ± 1,5**
- **Specific heat - Cp [J/kg° K]**  
Average value  
**1370**
- **Compressive stress at 2% deformation -  $\sigma_2$  [kg/m<sup>2</sup>]**  
EN 826  
**> 5000**
- **Pull-through resistance - [N]**  
EN 16382  
**> 750**
- **Dimensional stability [% Relative changes]**  
EN 1604  
**48 h, 70° C**  
**< 1**
- **Long term water absorption by diffusion - [%<sub>w</sub>]**  
EN 12088  
**< 1,1 d = 20 mm**  
**< 0,1 d = 120 mm**
- **Long term water absorption by diffusion - [kg/m<sup>2</sup>]**  
EN 12088  
**< 0,22 d = 20 mm**  
**< 0,14 d = 120 mm**
- **Emissivity -  $\epsilon$**   
**> 0,05**
- **Weight percentage of recycled material - [%]**  
Average values  
**> 4**

## ADDITIONAL REPORTS AND CERTIFICATION

- **Management System Certification:**
  - UNI EN ISO 9001:2015 quality management system,
  - UNI EN ISO 14001:2015 environmental management system,
  - OHSAS 18001:2007 occupational health and safety management system

## NOTES

### ■ Temperature stability

Stiferite panels can be used in a continuous temperature range of -40° C to +110° C. For periods of time they can withstand temperatures up to + 200° C, or equivalent to the softening temperature of bitumen, without any particular problems. Long exposures at temperatures above + 110° C may cause deformations to the foam or coatings, but do not cause sublimation or melting.

### ■ Aspect

Any small non-adhesion areas between the facers and the foam or holes originate from the production process and they do not in any way affect the physical-mechanical properties of the panels. A prolonged exposure of polyurethane foam to UV rays can cause surface oxidation, the phenomenon does not affect the basic characteristics and performance of the panel.

### ■ Packaging & Storage

STIFERITE panels of standard sizes are normally packed with PE, in closed packages with CE mark label. Store the packages raised from the ground. For long periods, store the packages in dry area.

### ■ Warning

The data shown in this sheet are binding for the features and performances provided by the CE marking. Other features and additional information may be modified even if no specific signal is available.

### ■ Other notes

To obtain technical data not covered in this Technical Data Sheet, contact the Stiferite Technical Office